



Pioneering for You

wilo

Sewage Lifting Unit


Wilo-DrainLift XL





Field of application Wastewater collection and transport

Duty chart

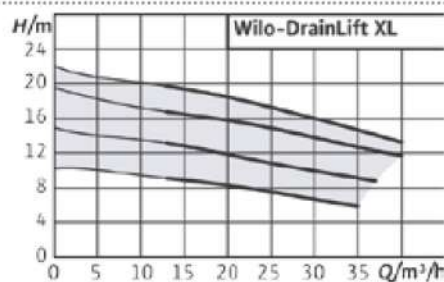

Construction Sewage lifting unit
Double-pump system

Application Pumping of sewage containing faeces that cannot be returned to the sewer system using natural falls.

Volume flow Q_{max} 40 m³/h

Delivery head H_{max} 22 m

Special features

- Flexible thanks to height-adjustable and swivel-mounted inlet connection
- Easy operation due to menu-guided switchgear
- Integrated non-return valve
- Operationally reliable due to high switching volume and reliable level detection
- Continuous duty thanks to the use of self-cooling motors

Technical data

- Mains connection: 3~400 V, 50 Hz
- Operating mode: S1
- Fluid temperature: max. 40 °C
- Pressure connection: DN 80
- Gross volume: 380 l
- Switching volume: 260 l

Equipment/function

- Thermal motor monitoring
- Level control with level sensor
- Menu-guided switchgear with potential-free contact
- Inlet seal DN 150
- Keyhole saw for inlet seal
- Non-return valve
- Hose connection for venting and diaphragm hand pump
- Kit for pressure pipe connection
- Installation material

Address:

SAPPHIRE FLUID SYSTEMS
No.143/144, Ground Floor, Kempegowda Layout,
Outer Ring Road, Laggere, Bangalore – 560 058
T +91 99000 87727

Website:

www.sapphirefluidsystems.in
sapphire@fluidsystems.co.in

<https://www.facebook.com/people/Sapphire-Fluid-Systems/61566589806616/>